





## PROPORTIONAL FLOW REGULATOR 3 WAYS

### SPECIFICATIONS

|                             |                             |
|-----------------------------|-----------------------------|
| Max. System Pressure:       | 241 bar                     |
| Leakage:                    | 250cc/min                   |
| Hysteresis:                 | ±5%                         |
| Viscosity range:            | 36 to 3000 SU/ 3 to 647 cSt |
| Filtration:                 | ISO 18/16/13                |
| Media Operating Temp.range: | -30°C/+100°C                |
| Weight:                     | 0.34kg                      |
| Cartridge Torque:           | 50 Nm                       |
| Coil Nut Torque:            | 3 - 4 Nm                    |

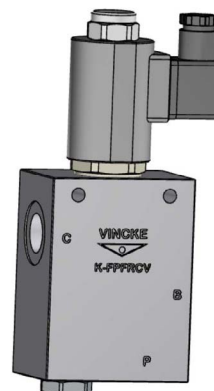


### DIMENSIONS (mm)

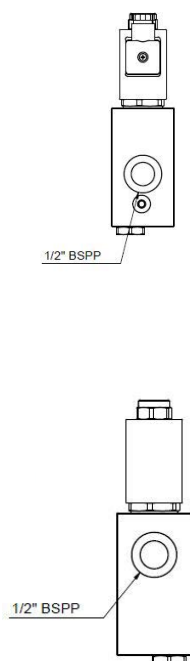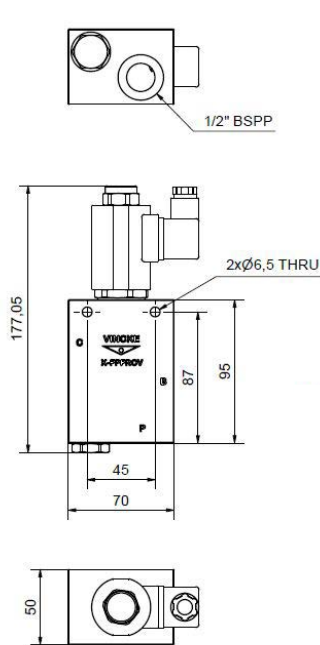

### PERFORMANCE

Coil 12 VDC - 130Hz PWM - Oil 26 cSt (121) SSU 50°C

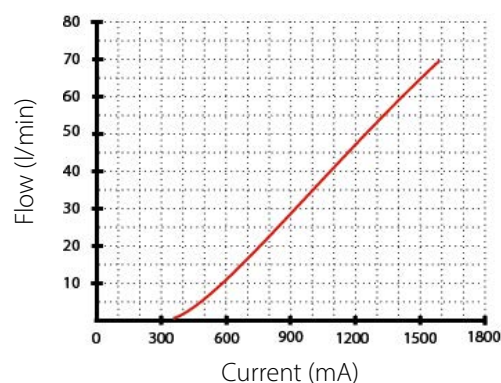

| Standard code | Thread | Q max (l/min) | Q (l/min) Reg | Max. Press | Volt. |
|---------------|--------|---------------|---------------|------------|-------|
| K-PFRLV-12-12 | 1/2    | 110           | 60            | 350        | 12 dc |
| K-PFRLV-12-24 | 1/2    | 110           | 60            | 350        | 24 dc |