PROPORTIONAL FLOW REGULATOR 3 WAYS

SPECIFICATIONS

Max. System Pressure:	241 bar
Leakage:	250cc/min
Hysteresis:	±5%
Viscosity range:	36 to 3000 SU/ 3 to 647 cSt
Filtration:	ISO 18/16/13
Media Operating Temp.range:	-30ºC/+100ºC
Weight:	0.34kg
Cartridge Torque:	50 Nm
Coil Nut Torque:	3 - 4 Nm

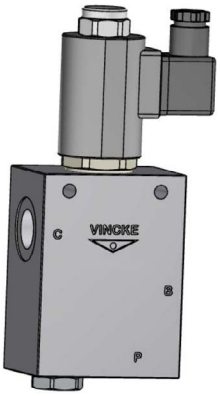



DIMENSIONS (mm)

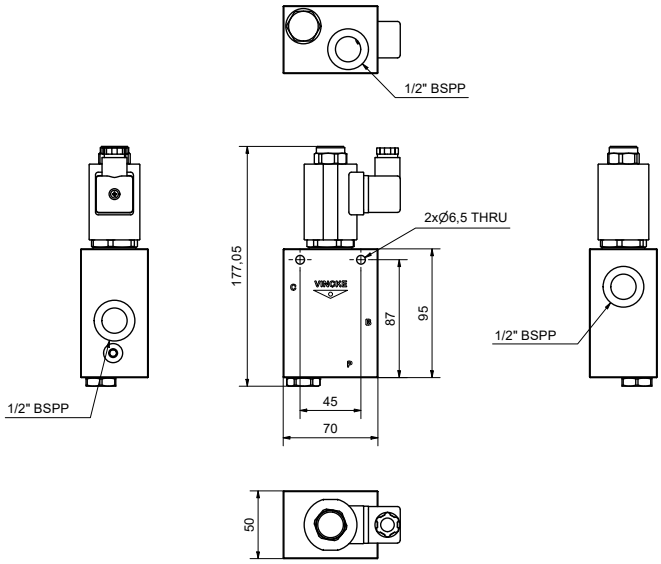

PERFORMANCE

Coil 12 VDC - 130Hz PWM - Oil 26 cSt (121) SSU 50ºC

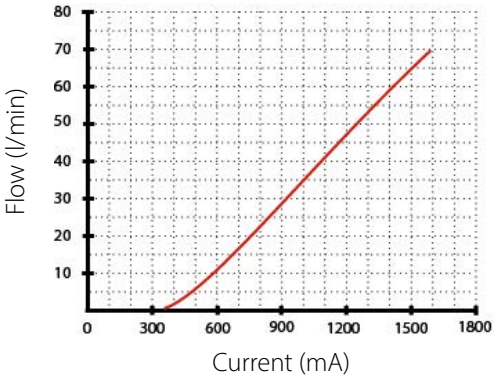

Ref.	Standard code	Thread	Q max (l/min)	Q (l/min) Reg	Max. Press	Volt.
VNKLV140601	K-PFRLV-12-12	1/2	114	57	240	12 dc
VNKLV140602	K-PFRLV-12-24	1/2	114	57	240	24 dc