



3-WAYS HIGH PRESSURE MANUAL DIVERTER VALVES

SPECIFICATIONS


| | |
|----------------------|--------------------------|
| Fluid viscosity: | 15-250mm ² /s |
| Filtration: | ISO 4406 |
| Fluid temperature: | -20°C + 80°C |
| Ambient temperature: | -20°C + 50°C |



DIMENSIONS (mm)

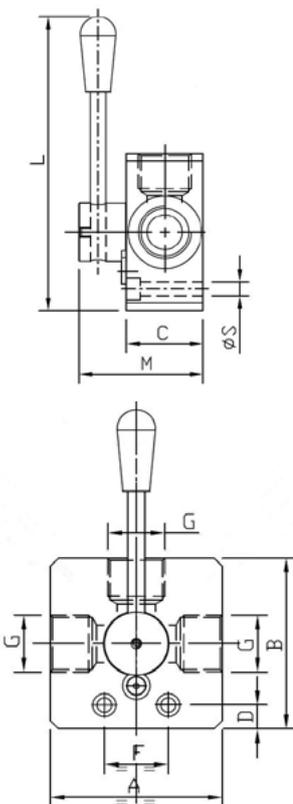

PERFORMANCE

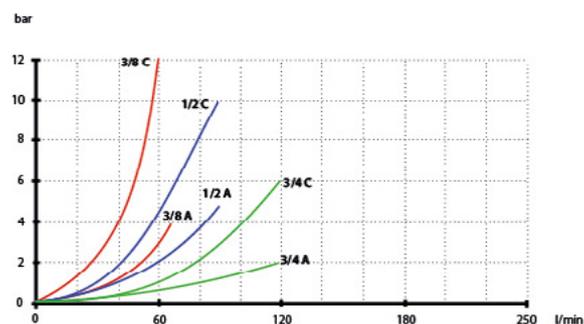

| Standard code | Thread | Func | A | B | C | D | F | L | M | S | Q max (l/min) | Max Pres | kg |
|---------------|--------|------|----|----|----|------|----|-----|----|-----|---------------|----------|------|
| DDFA3140-A | 1/4 | A/C | 60 | 60 | 40 | 10.5 | 30 | 167 | 68 | 8.5 | 50 | 400 | 1.10 |
| DDFA3380-A | 3/8 | A/C | 60 | 60 | 40 | 10.5 | 30 | 167 | 68 | 8.5 | 60 | 400 | 1.10 |
| DDFA3120-A | 1/2 | A/C | 60 | 60 | 40 | 10.5 | 30 | 167 | 68 | 8.5 | 90 | 400 | 1.05 |
| DDFA3340-A | 3/4 | A/C | 80 | 80 | 40 | 14 | 32 | 177 | 68 | 8.5 | 120 | 400 | 1.75 |