



IN-LINE PANEL MOUNTING RELIEF VALVES

SPECIFICATIONS

Fluid viscosity:	30 - 100 mm ² /s
Filtration:	25μ
Ambient temperature:	40°C
Fluid temperature:	-20°C + 75°C
Ambient temperature:	-20°C + 50°C



DIMENSIONS (mm)

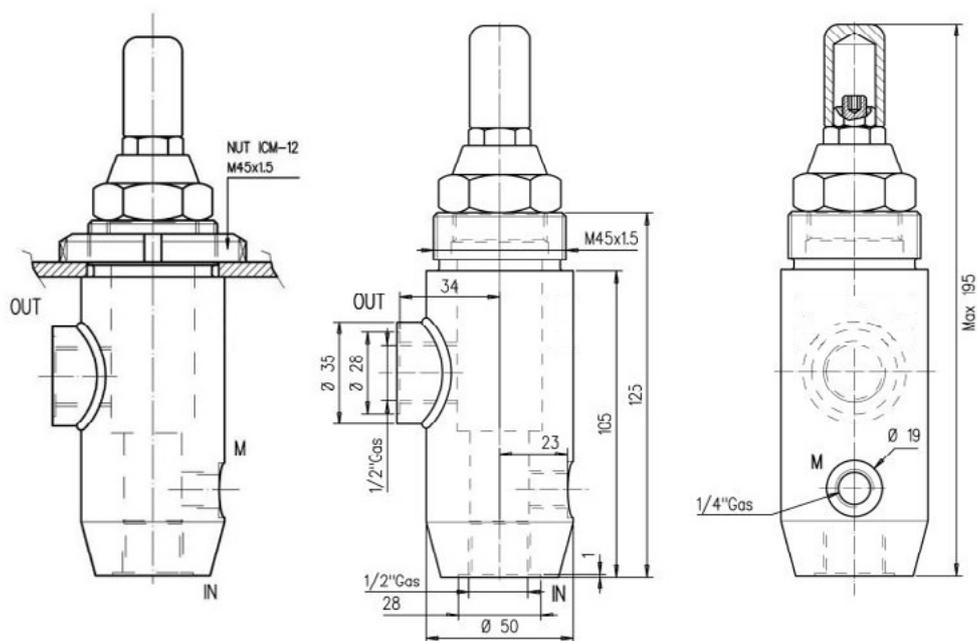

Standard code	Thread	Q max (l/min)	Pressure	Weight (kg)
K-DRLVBH-20	1/2	50	3 - 20	2
K-DRLVBH-80	1/2	50	10 - 80	2
K-DRLVBH-160	1/2	50	60 - 160	2
K-DRLVBH-280	1/2	50	100 - 280	2
K-DRLVBH-320	1/2	20	100 - 320	2