



UNIDIRECTIONAL FLOW CONTROL VALVES

SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Manifold material:	Zinc plated steel




DIMENSIONS (mm)

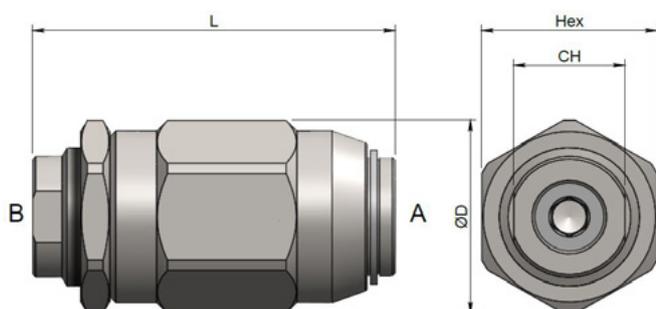

PERFORMANCE

Oil viscosity 24 mm³/s (3,5 °E) - Temperature 50°C

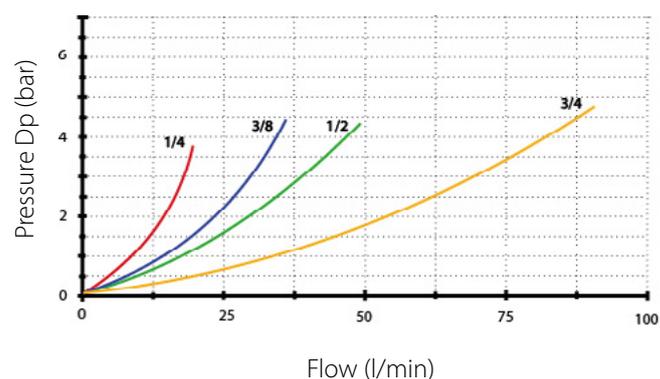

Standard code	Thread	ØD	L	CH	Hex	Weight (kg)	Max Pressure	Q max (l/min)
K-FRLV-UHX-14	1/4	33.5	62	19	30	0.24	350	15
K-FRLV-UHX-38	3/8	35.3	73	24	32	0.43	350	35
K-FRLV-UHX-12	1/2	46	83	30	41	0.68	350	45
K-FRLV-UHX-34	3/4	60.5	102	36	55	1.31	300	80