



## EXTERNAL PILOT OPERATED SINGLE CHECK VALVES

### SPECIFICATIONS

Fluid viscosity:	ISO 3448
Filtration:	ISO 4406
Fluid temperature:	-20°C + 90°C
Ambient temperature:	-20°C + 50°C
Standard seals:	NBR
External surfaces:	Zinc plated steel




### DIMENSIONS (mm)

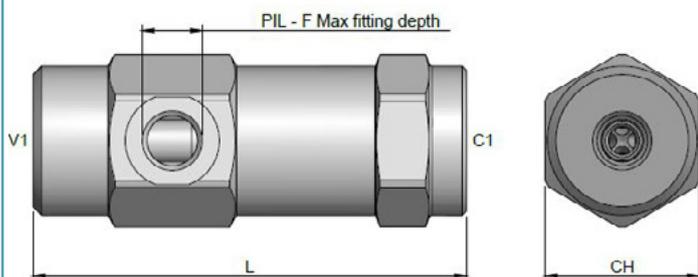

### PERFORMANCE

Oil viscosity 24 mm<sup>3</sup>/s (3,5 °E) - Temperature 50°C

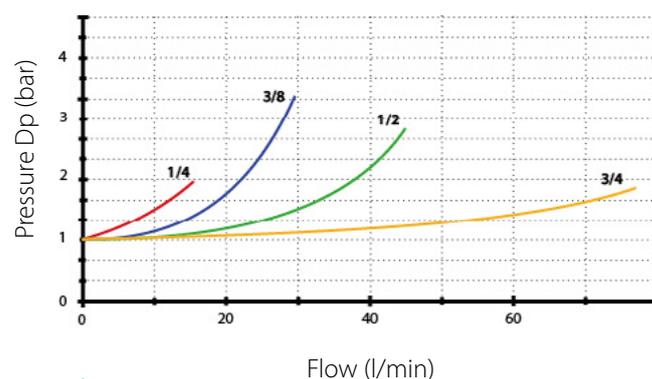

X = 1 bar Std  
Y = 3 bar  
Z = 8 bar

Standard code	Thread	L	F	CH	Weight (kg)	Q max (l/min)	Max Pressure	Pilot ratio
K-SPCELV-14	1/4	103	12	35	0.7	20	350	8.5 : 1
K-SPCELV-38	3/8	109	12	40	0.9	30	300	6 : 1
K-SPCELV-12	1/2	122	12	42	1.1	45	300	5.5 : 1
K-SPCELV-34	3/4	131	14	55	2	80	250	4 : 1