




SEQUENCE VALVES

SPECIFICATIONS

Fluid viscosity:	10-550 mm ² /s
Filtration:	ISO 16/13
Fluid temperature:	-20°C + 80°C
Ambient temperature:	-20°C + 50°C
Max. operating pressure:	350 Bar
Setting at:	5 l/min
Material:	Zinc plated steel

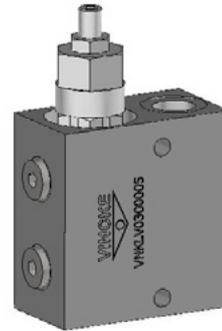


DIMENSIONS (mm)

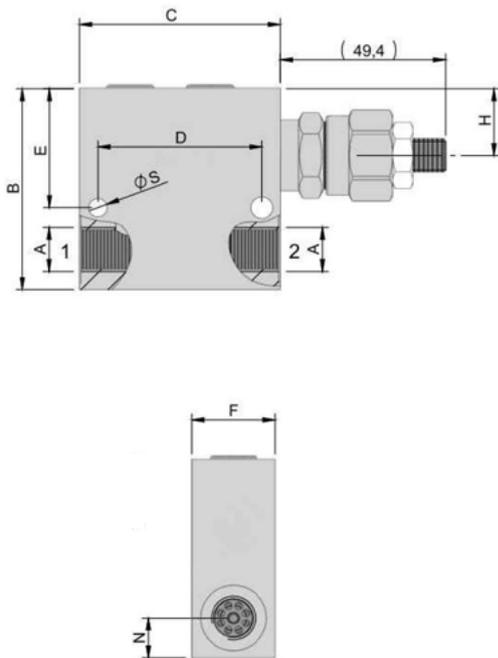

PERFORMANCE

Oil viscosity 24 mm³/s (3,5 °E) - Temperature 50°C

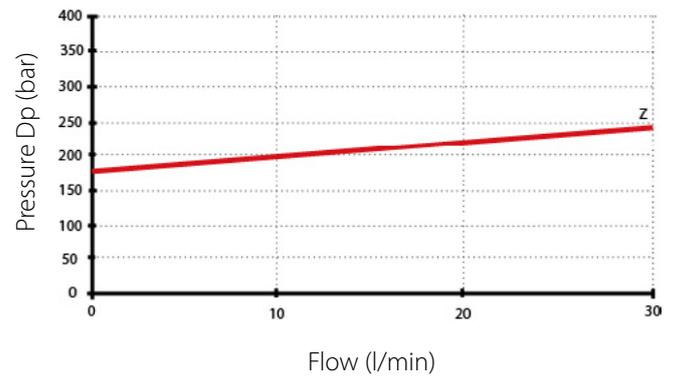

	Range	Standard Calibration	Pressure increase (bar/turn)
Z	50-210	200	65

ADJUSTMENT

M Leackproof hex. socket screw



Standard code	Thread	B	C	D	E	F	H	N	ØS	Weight (kg)	Q max (l/min)
K-SQLV-38	3/8	60	70	58	32.5	30	17	13	6.5	0.7	20
K-SQLV-12	1/2	70	70	58	35	30	17	17	6.5	0.9	40