


High Pressure / Thermoplastic hose

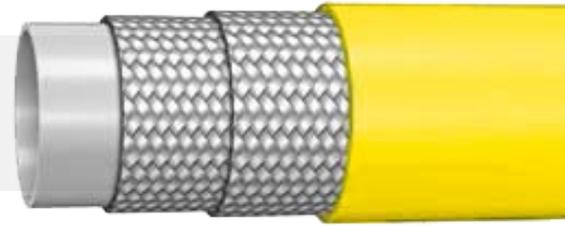

VINCKE WH-08W

| WASH-TH | | | | | | | | | | |
|-----------|-----------------------|----------------------|-----------------------|-----------------------|----------------|---------------------|--------|-------|-----|-----|
| Code | Nominal \varnothing | Inside \varnothing | Outside \varnothing | Max. Working Pressure | Burst Pressure | Minimum Bend Radius | Weight | | | |
| Dash Size | inch | mm | mm | bar | psi | bar | psi | mm | g/m | |
| 08W04 | 04 | 1/4" | 6,6 | 13 | 280 | 4000 | 840 | 12000 | 40 | 124 |
| 08W06 | 06 | 3/8" | 8,18 | 17,5 | 280 | 4000 | 840 | 12000 | 75 | 217 |
| 08W08 | 08 | 1/2" | 12,7 | 22,4 | 280 | 4000 | 690 | 10000 | 100 | 316 |
| 08W12 | 12 | 3/4" | 19 | 30 | 250 | 3600 | 625 | 9000 | 125 | 521 |
| 08W16 | 16 | 1" | 25,4 | 38,1 | 250 | 3600 | 625 | 9000 | 160 | 811 |

Construction:

Internal core thermoplastic polyester

Reinforcement Two or more braids of polyester fiber

Cover Polyurethane, Yellow colour

Temperature Range: Continuous: -40°C to +60°C

Note: Special colours available on request

