


Medium pressure / Thermoplastic hose Hydraulic - Paint Spray

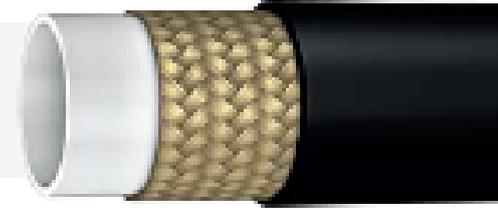

VINCKE TH-77

PAINT-OIL 1W										
Code	Nominal ϕ	Inside ϕ	Outside ϕ	Max. Working Pressure		Burst Pressure	Minimum Bend Radius	Weight		
Dash Size	inch	mm	mm	bar	psi	bar	psi	mm	g/m	
7703	03	3/16"	4,8	9,7	350	5075	1400	20300	30	133
7704	04	1/4"	6,6	11,8	300	4350	1200	17400	40	170
7705	05	5/16"	8,18	14	240	3480	960	13920	50	221
7706	06	3/8"	9,65	16	225	3263	900	13050	60	260
7708	08	1/2"	12,7	19,2	190	2755	760	11020	75	326
7710	10	5/8"	16	23,3	150	2175	600	8700	110	412
7712	12	3/4"	19	26,5	130	1885	520	7540	150	454
7716	16	1"	25,5	32,5	105	1523	420	6090	185	590

Construction:

Internal core Polyamide single - thermoplastic polyester twin

Reinforcement One high tensile steel braid.

Cover Polyurethane

Note: Available twin with different hose combination/size, also micro perforated and special colours available on request.

Temperature Range: Continuous: -40°C to +100°C

Temperature not to exceed +70°C for air and water based fluids.

