



Schottverschraubung für Manometer - Serie 620.08 Bulkhead pressure gauge connection - series 620.08

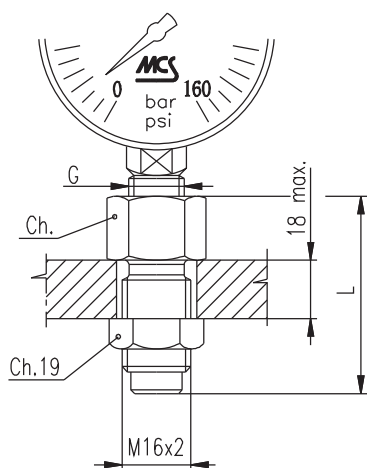


Gewinde Thread	p max.	Abmessungen Dimensions		Freier Durchfluss	Mit Druck- minderer
G		Ch. mm	L mm	Free flow	With pressure damper
*ISO228-G 1/4"	630 bar	19	50	620.08.204.00	620.08.204.00.1
*ISO228-G 1/2"	630 bar	27	58	620.08.208.00	620.08.208.00.1
1/4" NPTF	630 bar	19	50	620.08.304.00	620.08.304.00.1
1/2" NPTF	630 bar	27	58	620.08.308.00	620.08.308.00.1

Manometeradapter - Serie 620.09 Pressure gauge adapter - series 620.09

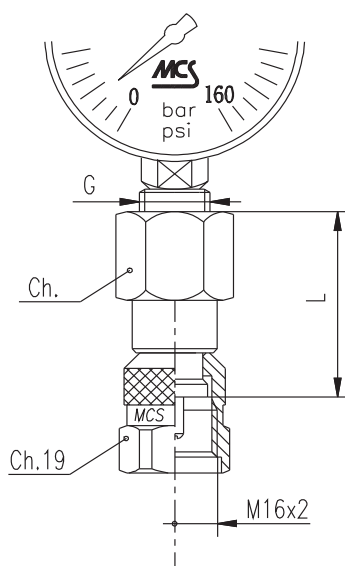

Gewinde Thread	p max.	Abmess. Dimens.		Freier Durchfluss	Mit Druck- minderer
G		Ch. mm	L mm	Free flow	With pressure damper
*ISO228-G 1/4"	630 bar	19	34	620.09.204.00	620.09.204.00.1
*ISO228-G 1/2"	630 bar	27	39	620.09.208.00	620.09.208.00.1
1/4" NPTF	630 bar	19	34	620.09.304.00	620.09.304.00.1

90°-Schwenkanschluss für Manometer - Serie 620.10 90° pressure gauge swivel connection - series 620.10

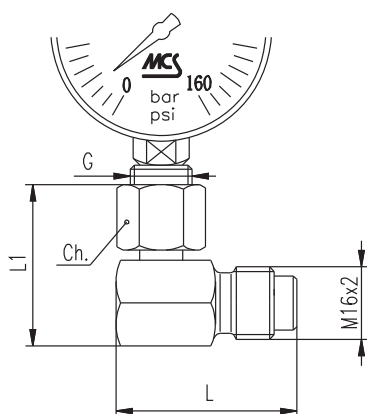

Gewinde Thread	p max.	Abmessungen Dimensions			Freier Durchfluss	Mit Druck- minderer
G		Ch. mm	L mm	L1 mm	Free flow	With pressure damper
*ISO228-G 1/4"	630 bar	17	40	40	620.10.204.00	620.10.204.00.1
*ISO228-G 1/2"	630 bar	27	40	42,7	620.10.208.00	620.10.208.00.1

* Anschluss für Manometer gemäß DIN 16288
* Gauge connection acc. DIN 16288