



Direct acting pressure reducing valve with check valve

mod. RP25VU

Aluminium body

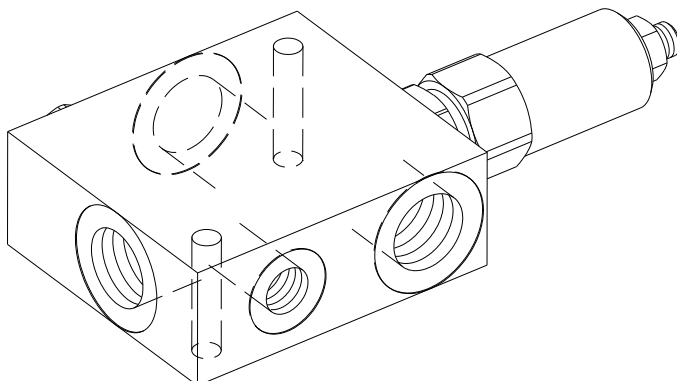


Type	P, T R	M	Max. pressure		Max. flow
			Inlet	Regulated	
RP25VU-38	3/8"	1/4"	300 bar	130 bar	25 l/min
RP25VU-12	1/2"	1/4"	300 bar	130 bar	25 l/min

Setting		
Code	Standard setting bar (Q=5 l/min)	Adj. Pressure range bar
01	80	20÷100
02	120	40÷130

Adjustments			
A	B	C	D
Vite esterna esagono incassato Leakproof hex socket screw	Volantino e dado Handknob and locknut	Piombatura Sealing cap	Cappello Cap

Dati e tarature ottenuti usando olio con viscosità 30 cSt a 50°C Performances and calibrations are carried out by using hydraulic oil with 30 cSt viscosity at 50°C	
Viscosità consigliate Recommended viscosity	10 ÷ 420 cSt
Temperature di lavoro Working temperature	-20 ÷ +90 °C
Filtrazione assoluta Absolute filtration	25 µ

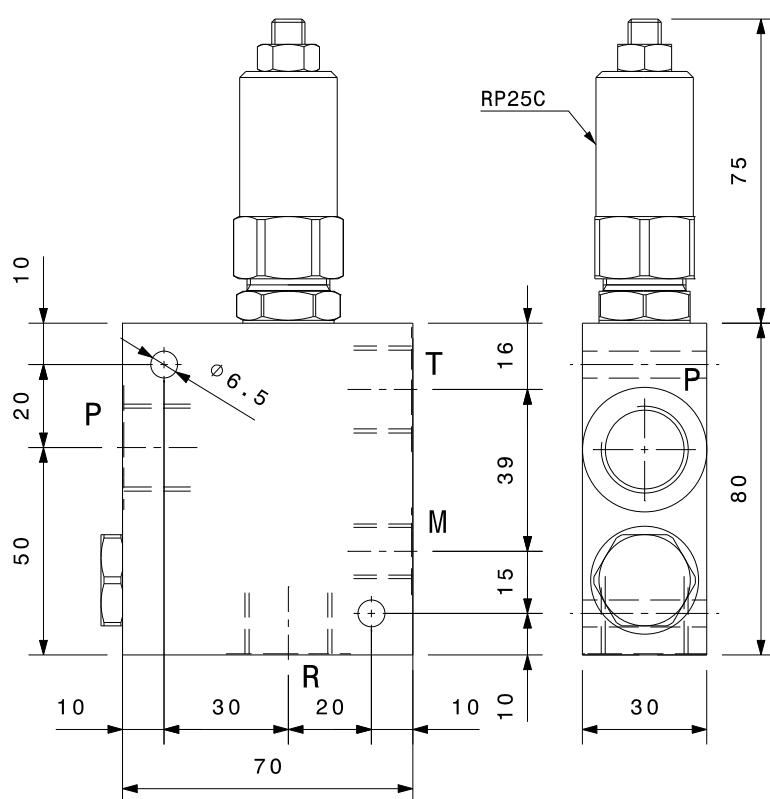

Ordering code

RP25VU-38	02	A
Type	Setting code 01, 02	Adjustment code A, B, C, D