

TECHNICAL DATA

Standard:	ISO 7241 A
Occlusion:	poppet
Locking:	radial balls
Material:	stainless steel AISI 316
Threads:	BSPP
Standard seals:	FKM
Working temperature:	-25° C + 200° C
Optional seals:	FKM - EPDM
Workings pressure:	160-315 bar
Connection under residual pressure:	not allowed




Applications:

Versatile VSAX series couplings are used in a wide range of hydraulic applications including agricultural applications, mobile and construction equipment. In-plant machinery including hydraulic power units and hand tools

They can be found anywhere where the fluid transfer lines need to be connected and disconnected for operations or maintenance of equipment.

Interchange Standard

Stucchi BIR
Faster ANV
Aeroquip FD 56
Snap Tite 61
Dnp PAV1
Eaton 5600
Holmbury IA
Parker 60 series

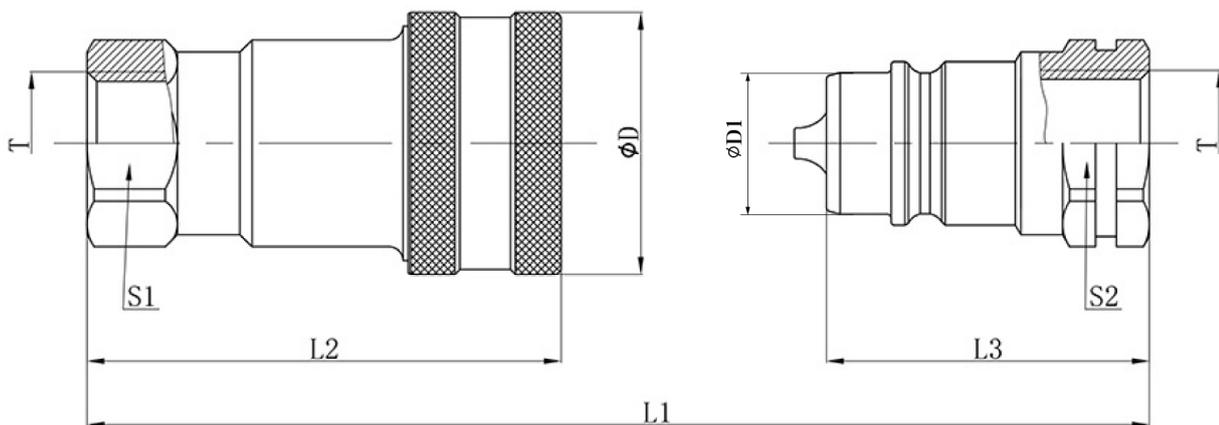

Type	ISO Ø	L1	L2	L3	ØD	ØD1	S1	S2	T
VSAX14	6,3	70	49,2	35	26	11,8	19	19	BSPP 1/4"
VSAX38	10	85,3	60,5	42,5	30,5	17,3	22	22	BSPP 3/8"
VSAX12	12,5	93	68,5	46,5	38	20,5	27	27	BSPP 1/2"
VSAX34	20	114,2	84,1	57,1	46	29,10	34	34	BSPP 3/4"
VSAX100	25	131,8	99,5	65,5	52	34,3	41	41	BSPP 1"
VSAX114	31,5	148	116	74	69,5	45	50	50	BSPP 1" 1/4"
VSAX112	40	168	133,2	84	82	55	83	60	BSPP 1" 1/2"