


VNK1 GEAR PUMP GROUP 1

RIGHT AND LEFT GEAR PUMP GROUP 1

End cover: G3/8 thread depth 12. To mount the pump, n.2 M8 screws, with a torque wrench setting fixed at 27±3 Nrn.

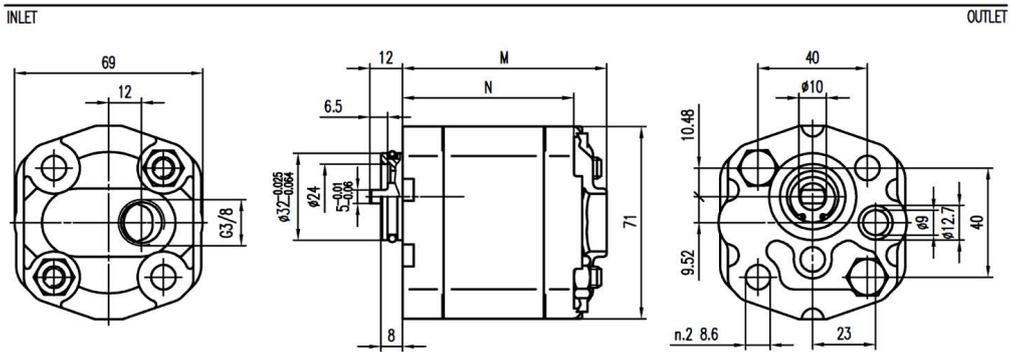

Type	Displacement cm ³ /rev	Max. Pressure			Max. Speed rW/min	Min. Speed r/min	Dimensions	
		P1	P2	P3			M mm	L mm
VNK-1-0.8	0.8	250	270	290	6000	1000	73.5	61,5
VNK-1-1.1	1.1	250	270	290	6000	1000	74	62
VNK-1-1.3	1.3	250	270	290	6000	1000	75	63
VNK-1-1.6	1.6	250	270	290	6000	1000	76	64
VNK-1-1.8	1.8	250	270	290	6000	1000	77	65
VNK-1-2.1	2.1	250	270	290	6000	1000	78	66
VNK-1-2.7	2.7	250	270	290	6000	800	80	68
VNK-1-3.2	3.2	250	270	290	5000	800	82	70
VNK-1-3.7	3.7	250	270	290	4500	800	84	72
VNK-1-4.2	4.2	250	270	290	4000	800	86	74
VNK-1-4.8	4.8	230	250	270	3500	600	88	76
VNK-1-5.8	5.8	230	250	270	3000	600	92	80
VNK-1-5.8	7	210	230	250	2500	600	96	84
VNK-1-8.0	8	180	200	230	2100	600	100	88
VNK-1-9.8	9.8	150	170	190	2100	600	104	92



ORDERING CODE

Right		Left	
Ref	cm ³	Ref	cm ³
VNKPP020301	0.8	VNKPP020401	0.8
VNKPP020302	1.1	VNKPP020402	1.1
VNKPP020303	1.3	VNKPP020403	1.3
VNKPP020304	1.6	VNKPP020404	1.6
VNKPP020305	1.8	VNKPP020405	1.8
VNKPP020306	2.1	VNKPP020406	2.1
VNKPP020307	2.7	VNKPP020407	2.7
VNKPP020308	3.2	VNKPP020408	3.2
VNKPP020309	3.7	VNKPP020409	3.7
VNKPP020310	4.2	VNKPP020410	4.2
VNKPP020311	4.8	VNKPP020411	4.8
VNKPP020312	5.8	VNKPP020412	5.8
VNKPP020313	7	VNKPP020413	7
VNKPP020314	8	VNKPP020414	8
VNKPP020315	9.8	VNKPP020401	9.8

