



Male stud connector G2-R (L Series)

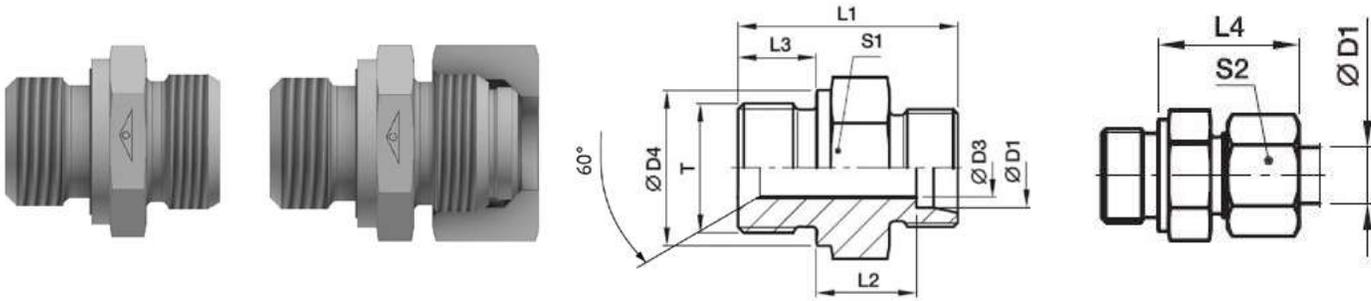

Series	Order code	D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
													Z	SS
L	G2-6LR1/8	06	G 1/8 A	4	14	23.5	8.5	8	23.0	14	14	14	315	315
	G2-6LR1/4	06	G 1/4 A	4	18	29.0	10.0	12	25.0	19	14	60	315	315
	G2-8LR1/4	08	G 1/4 A	6	18	29.0	10.0	12	25.0	19	17	26	315	315
	G2-8-LR1/8	08	G 1/8 A	4	14	23.5	8.5	8	23.0	14	17	16	315	315
	G2-8LR3/8	08	G 3/8 A	6	22	30.5	11.5	12	26.0	22	17	44	315	315
	G2-8LR1/2	08	G 1/2 A	6	26	33.0	12.0	14	27.0	27	17	74	315	315
	G2-10LR1/4	10	G 1/4 A	6	18	30.0	11.0	12	26.0	19	19	31	315	315
	G2-10LR3/8	10	G 3/8 A	8	22	31.5	12.5	12	27.0	22	19	44	315	315
	G2-10LR1/2	10	G 1/2 A	8	26	34.0	13.0	14	28.0	27	19	72	315	315
	G2-12LR1/4	12	G 1/4A	9	22	31.5	12.5	12	27.0	22	22	43	315	315
	G2-12LR3/8	12	G 3/8 A	6	18	31.0	12.0	12	27.0	19	22	32	315	315
	G2-12LR1/2	12	G 1/2 A	10	26	34.0	13.0	14	28.0	27	22	67	315	315
	G2-15LR3/8	15	G 3/8 A	11	26	35.0	14.0	14	29.0	27	27	72	250	250
	G2-15LR1/2	15	G 1/2A	9	22	32.5	13.5	12	29.0	24	27	56	250	250
	G2-18LR3/8	18	G 3/8 A	14	26	36.0	14.5	14	31.0	27	32	72	250	250
	G2-18LR1/2	18	G 1/2 A	9	22	33.5	14.0	12	29.5	27	32	69	250	250
	G2-22LR1/2	22	G 1/2 A	18	32	40.0	16.5	16	33.0	32	36	103	160	160
	G2-22LR3/4	22	G 3/4 A	14	26	38.0	16.5	14	33.0	32	36	91	160	160
	G2-22LR1	22	G 1 A	19	39	43.0	17.5	18	33.5	41	36	184	160	160
	G2-28LR3/4	28	G 3/4 A	23	39	43.0	17.5	18	34.0	41	41	168	160	160
G2-28LR1	28	G 1 A	18	32	41.0	17.5	16	34.0	41	41	156	160	16	
G2-35LR11/4	35	G 1 1/4 A	30	49	48.0	17.5	20	39.0	50	50	276	160	160	
G2-35LR11/2	35	G 1 1/2 A	30	55	52.0	19.5	22	41.0	55	50	355	160	160	
G2-42LR11/2	42	G 1 1/2 A	36	55	52.0	19.0	22	42.0	55	60	349	160	160	

Male stud connector G2-R (S Series)

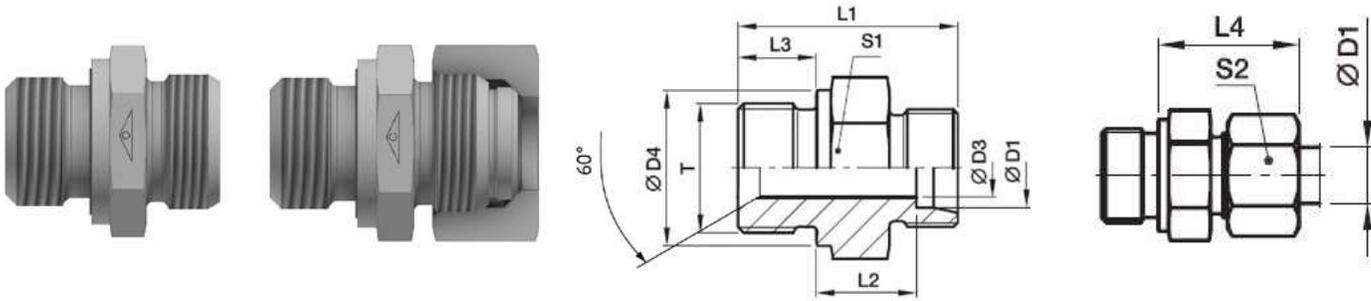

Series	Order code	D1	T	D3	D4	L1	L2	L3	L4	S1	S2	Weight (g)	PN (bar)	
													Z	SS
S	G2-6SR 1/4	06	G 1/4 A	4	18	32.0	13.0	12	28	19	17	35	400	400
	G2-6SR 3/8	06	G 3/8 A	4	22	34.5	15.5	12	30	22	17	57	400	400
	G2-8SR 1/4	08	G 1/4 A	5	18	34.0	15.0	12	30	19	19	41	400	400
	G2-8SR 3/8	08	G 3/8 A	5	22	34.5	15.5	12	30	22	19	59	400	400
	G2-10SR 3/8	10	G 3/8 A	7	22	34.5	15.0	12	31	22	22	56	400	400
	G2-10SR 1/4	10	G 1/4 A	5	18	34.5	14.5	12	31	19	22	43	400	400
	G2-12SR 3/8	12	G 3/8 A	8	22	36.5	17.0	12	33	22	24	62	400	400
	G2-12SR 1/4	12	G 1/4 A	5	18	36.0	16.5	12	33	22	24	57	400	400
	G2-12SR 1/2	12	G 1/2 A	8	26	39.0	17.5	14	34	27	24	57	400	400
	G2-14SR 1/2	14	G 1/2 A	10	26	41.0	19.0	14	37	27	27	96	400	400
	G2-14SR 3/8	14	G 3/8 A	8	22	38.5	18.5	12	36	24	27	74	400	400
	G2-16SR 1/2	16	G 1/2 A	12	26	41.0	18.5	14	37	27	30	92	400	400
	G2-16SR 3/8	16	G 3/8 A	8	22	38.5	18.0	12	36	27	30	83	400	400
	G2-20SR 3/4	20	G 3/4 A	16	32	47.0	20.5	16	42	32	36	151	400	400
	G2-20SR 1/2	20	G 1/2 A	12	26	45.0	20.5	14	42	32	36	142	400	400
	G2-25SR 1	25	G 1 A	20	39	53.0	23.0	18	47	41	46	267	250	250
	G2-25SR 3/4	25	G 3/4 A	16	32	51.0	23.0	16	47	41	46	245	250	250
	G2-30SR 1	30	G 1 A	25	32	53.0	23.5	20	50	50	50	390	160	160
	G2-30SR 1 1/4	30	G 1 1/4 A	25	49	57.0	23.5	20	50	50	50	422	160	160
	G2-30SR 1	30	G 1 A	20	39	55.0	23.5	18	50	46	50	337	160	160
G2-38SR 1 1/2	38	G 1 1/2 A	32	55	64.0	26.0	22	57	55	60	560	160	160	
G2-38SR 1 1/4	38	G 1 1/4 A	25	49	62.0	26.0	20	57	55	60	578	160	160	