



VNKO GEAR PUMP GROUP 0

End cover: G1 / 4 thread depth 12. To mount the pump, n.2 M5 screws, with a torque wrench setting fixed at 5.4±0.5 Nm.

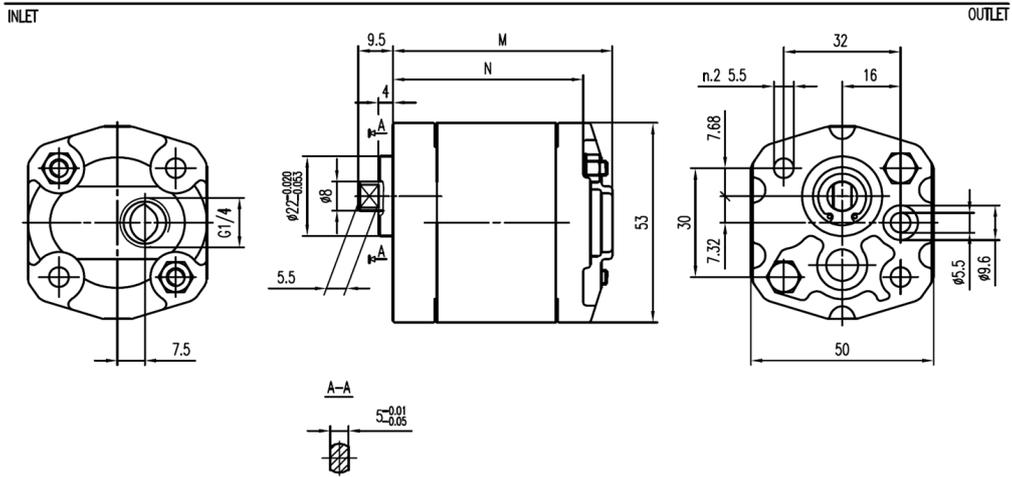

Type	Displacement cm ³ /rev	Max. Pressure			Max. Speed r/min	Min. Speed r/min	Dimensions	
		P1	P2	P3			M mm	N mm
VNK-0-0.19	0.19	200	230	250	7000	1000	60	58.2
VNK-0-0.25	0.25	200	230	250	7000	1000	60,5	59
VNK-0-0.38	0.38	200	230	250	7000	1000	61,5	60,3
VNK-0-0.50	0.5	200	230	250	7000	1000	62,5	61
VNK-0-0.65	0.65	200	230	250	7000	1000	63,5	54,5
VNK-0-0.75	0.75	200	230	250	7000	1000	64,5	63,5
VNK-0-0.88	0.88	200	230	250	7000	1000	65,5	56,5
VNK-0-1	1,00	200	230	250	6000	850	66,5	66
VNK-0-1.25	1.25	200	230	250	500	700	68,5	68,5
VNK-0-1.5	1.5	200	230	250	400	600	70,5	70
VNK-0-1.75	1.75	180	210	230	4000	600	72,5	73
VNK-0-2	2	160	190	210	3000	500	74,5	75,5



ORDERING CODE

Right		Left	
Ref	cm ³	Ref	cm ³
VNKPP020101	0.19	VNKPP020201	0.19
VNKPP020102	0.25	VNKPP020202	0.25
VNKPP020103	0.38	VNKPP020203	0.38
VNKPP020104	0.50	VNKPP020204	0.50
VNKPP020105	0.65	VNKPP020205	0.65
VNKPP020106	0.75	VNKPP020206	0.75
VNKPP020107	0.88	VNKPP020207	0.88
VNKPP020108	1.00	VNKPP020208	1.00
VNKPP020109	1.25	VNKPP020209	1.25
VNKPP020110	1.50	VNKPP020210	1.50
VNKPP020111	1.75	VNKPP020211	1.75
VNKPP020112	2	VNKPP020212	2

